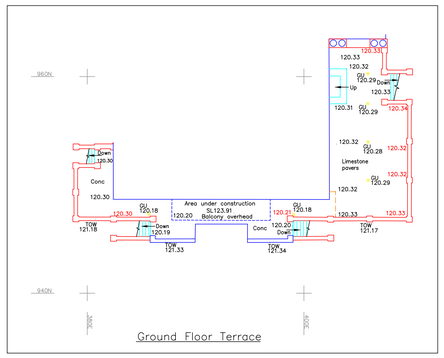

Coordinate Table

Station	Eastings	Northings	Level	Description
S1	500.000	1000.000	119.355	Peg
S2	483.254	1004.291	120.109	Nail
S3	476.288	993.914	119.412	Nail
S4	455.837	987.163	119.351	Nail
S5	450.828	975.426	118.728	Peg
S6	413.129	981.705	120.351	Nail
S7	388.781	987.473	120.464	Nail
S8	414.736	997.754	120.562	Peg
S9	370.598	961.170	119.927	Destroyed
S10	384.271	991.747	121.659	Peg
S11	368.227	991.747	120.659	Nail
S12	369.122	973.192	120.511	Peg
S13	392.398	915.505	115.783	Peg
S14	371.228	953.822	119.204	Peg
S15	456.734	913.189	115.583	Peg
S16	416.673	953.376	118.478	Destroyed
S17	477.517	949.188	116.319	Peg

Note

This survey data has been prepared for the client detailed below to an agreed specification. Unless otherwise agreed in writing the liability of 360 Geomatics Ltd is limited to the client or his appointed agent and does not extend to use beyond the limitations of the specification.

Survey is based on an arbitrary grid.

All levels are related to Newlyn datum (ODN).
Located on W face of the Gatehouse at ////////////////.
OSBM value 120.14m.

All levels on kerb lines are channel levels unless noted otherwise.

© Copyright. 360 Geomatics Ltd 2012

Abbreviations (where Applicable)

ACU	Air Conditioning Unit	KO	Kerb Outlet
AR	Assumed Route	LB	Litter Bin
BB	Belisha Beacon	LP	Lamp Post
BHL	Bore Hole	MS	Multi-stemmed tree
BL	Basement Light	MC	Mercury Inspection Cover
BO	Bollard	MH	Manhole
BP	Block Paving	MK	Marker Post
BRW	Brick Retaining Wall	NB	Notice Board
BS	Bus Stop	NFI	No Further Information
BSL	Beam Soffit Level	NP	Street Name Plate
BT	BT Inspection Cover	OHW	Overhead Wire
BM	Bench Mark	OSBM	Ordnance Survey Bench Mark
CB	Control Box	PB	Post Box
CCTV	Closed Circuit Television	PK	Portakabin
CL	Cover Level	PL	Plinth
Co	Column	PM	Parking Meter
Conc	Concrete	PO	Post
CPS	Concrete Paving Slabs	RE	Rodding Eye
CS	Cobblestones	RS	Road Sign
CT	Cable TV Inspection Cover	RW	Retaining Wall
CW	Concrete Wall	SL	Soffit Level
DC	Drainage Channel	SP	Spring Point Height
DK	Drop Kerb	SV	Stop Valve
DP	Down Pipe	SVP	Soil Vent Pipe
EJB	Electric Junction Box	SW	Stone Wall
EP	Electricity Pole	SWMH	Surface Water Manhole
ER	Earthing Rod	TCB	Telephone Call Box
FB	Flower Bed	THL	Threshold Level
FFL	Finished Floor Level	TK	Top of Kerb level
FG	Feeds Into Ground	TOF	Top of Fence
FL	Floor Light	TOW	Top of Wall
FP	Fuel Pump	TP	Telegraph Pole
FWMH	Foul Water Manhole	TPS	Tactile Paving Slabs
GA	Gate	UC	Under Construction
GM	Gas Meter	UT	Unable To Trace
GU	Gully	VT	Vent Pipe
GV	Gas Valve	WL	Water Level
h	Height (Metres)	WM	Water Meter
IB	Illuminated Bollard	WO	Washout
IC	Inspection Cover	WP	Waste Pipe
IL	Invert Level	WV	Water Valve

Fence Types

B/W	Barbed Wire	H/R	Hand Rail
C/B	Close Boarded	I/R	Iron Railing
C/I	Corrugated Iron	O/B	Open Boarded
C/L	Chain Link	P/S	Palisade Security
C/LS	Chain Link Security	P/R	Post and Rail
C/P	Chestnut Paling	P/W	Post and Wire

Legend

Survey Station

Banking

Tree / Species
Stem Diameter
G.G.H. Girth (Trunk Diameter)
S Spread (Canopy Radius)
H Height (Metres)

Rev Suffix	Revision Details	Initial	Date

Surveyed by

360GEOMATICS
LAND & MEASURED BUILDING SURVEYS
10 Salters Heath Road
Monk Sherborne, Tadley
Hampshire RG26 5HY
Tel: 01256 851672
Mob: 07734 233459
Email: info@360g.co.uk
Website: www.360g.co.uk

Client:

Job Title:

Drawing Title:

TOPOGRAPHIC SURVEY

Drawing No:			Rev Suffix:
Drawn: PB	Checked: DR	Scale: 1:200	Date:
Job No:		Sheet: 1 of 1	Sheet Size: A0